

**HOT MOULDED WEATHER PROOF JN BOX  
WITH EXTRADEEP INTEGRAL CANOPY**

**Rust Proof**

---

**Maintenance Free**

---

**IP 65**

---

**Fire Retardant**

---

**U.V. Stabilised**

---

**Corrosion Free**

---

**No Moisture Absorption**


---

**Aesthetic Looks**


---

**Shock Proof**

---

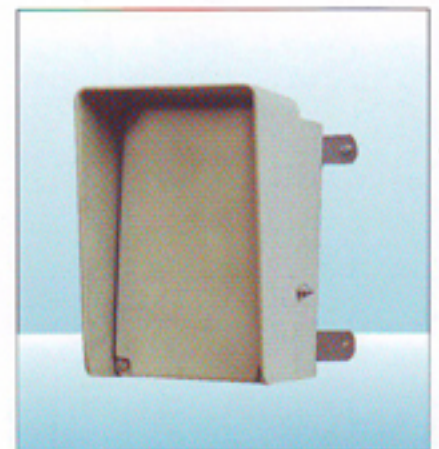



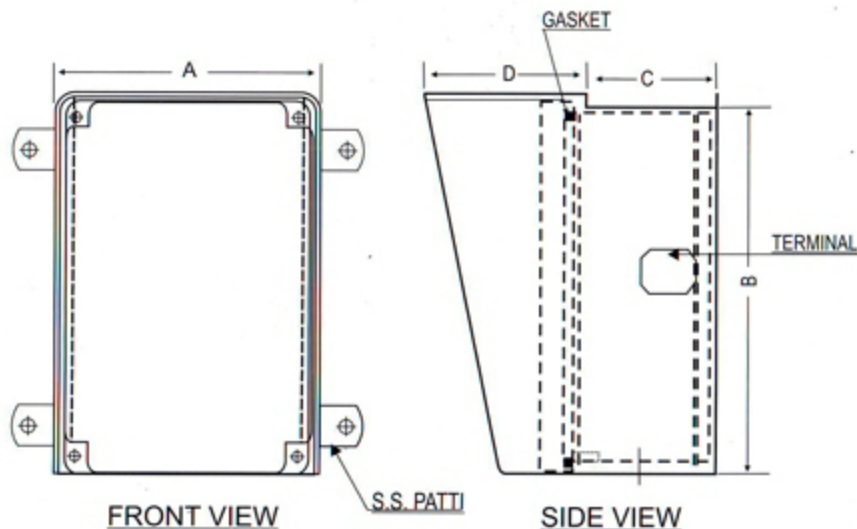

## SPECIFICATIONS

### Non FLP type FRP ENCLOSURE

MATERIAL OF CONSTRUCTION	FRP (SMC-Hot Moulded)
CANOPY	Yes (Extra Deep)
COLOUR	Grey
CABLE ENTRY	From Bottom
CABLE GLAND	As required
THICKENSS	4 to 5 mm
EARTHING POINT	Provided at both sides of the box
INSTALLATION	SS mounting lugs provided
MOUNTING OF TERMINALS	G.I. Grid Plate Provide
TERMINALS	Elmex / Brown / Connect well

**TYPE**      **A**      **B**      **C**      **D**

JB - 01	105	105	70	50	
JB - 02	135	165	95	85	
JB - 03	140	220	95	85	
JB - 04	225	300	120	85	
JB - 05a	450	525	225	125	Under development
JB - 05b	525	450	225	125	Under development



CLIENT :			
CONSULTANT :-			
CONTRACTOR :-			
PROJECT :			
SCALE		TITLE : JN Box	
DRN	k2drafters@gmail.com		
DATE	26/04/2011	DRG . NO.: LF-011-2011	REV. No :0

Product Improvement is a continous Process hence SPECIFICATIONS are Subject to change without Intimation